

Advanced Signals and Systems

Exam WS 2016/2017

Examiner: Prof. Dr.-Ing. Gerhard Schmidt
 Date: 26.09.2017
 Name: _____
 Matriculation Number: _____

Declaration of the candidate before the start of the examination	
<p>I hereby confirm that I am registered for, authorized to sit and eligible to take this examination.</p> <p>I understand that the date for inspecting the examination will be announced by the EE&IT Examination Office, as soon as my provisional examination result has been published in the QIS portal. After the inspection date, I am able to request my final grade in the QIS portal. I am able to appeal against this examination procedure until the end of the period for academic appeals for the second examination period at the CAU. After this, my grade becomes final.</p> <p style="text-align: right;">Signature: _____</p>	

Marking			
Problem	1	2	3
Points	/33	/26	/41
Total number of points: _____ /100			

Inspection/Return	
<p>I hereby confirm that I have acknowledged the marking of this examination and that I agree with the marking noted on this cover sheet.</p> <p><input type="checkbox"/> The examination papers will remain with me. Any later objection to the marking or grading is no longer possible.</p> <p>Kiel, dated _____ Signature: _____</p>	

Advanced Signals and Systems

Exam WS 2016/2017

Examiner: Prof. Dr.-Ing. Gerhard Schmidt
Date: 26.09.2017
Time: 09:00 h – 10:30 h (90 minutes)
Location: KS2, C-SR II


Remarks

- Please write your **name** and your **matriculation number** on each sheet of paper that you return.
- Please keep your student ID and your identity card ready.
- During the exam only questions concerning the problems are answered.
- Please don't use any pencil or red pen.
- Please use a **new** sheet of paper with your name and matriculation number on it for **each problem**. You can ask for more sheets of paper, if necessary.
- The exam is open books, open notes; other people are closed. Programmable electronic devices except pocket calculators are not permitted.
- Partial credit will be given. No credit will be given if an answer appears with no supporting work or reason.
- Note that the given points of the subproblems are just preliminary.
- At the end of the exam put all sheets together as you have received them, including the problem sheets.
- No one is allowed to talk or to leave his or her seat until **all** exams have been collected.
- The problems and the solutions will be published on the website of the lecture. Also the date and the place of the inspection will be announced on this website.

Problem 1 (33 points)

Part 1 *This part may be solved independently of Part 2.*

Given is the discrete impulse response $h_0(n)$:

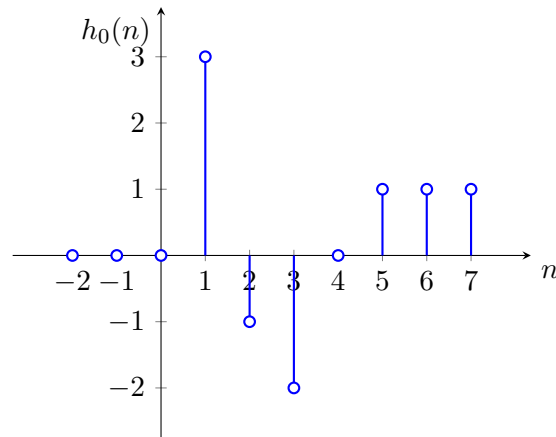

In addition to the graph the following holds:

$$h_0(n) = 0 \quad \forall n < 0,$$

$$h_0(n) = 1 \quad \forall n \geq 5.$$


- (a) Determine the equation for the impulse response based on weighted impulse- and step-functions. (3 P)
- (b) Does the system have a direct passthrough? Give reason to your answer. (2 P)
(*Hint:* No calculations necessary.)
- (c) Determine the transfer function $H(z)$. (3 P)
- (d) Determine the difference equation. (5 P)

Part 2 This part may be solved independently of Part 1.

In general a system in state-space description can be described by:

$$\begin{aligned} \mathbf{x}(n+1) &= \mathbf{A} \mathbf{x}(n) + \mathbf{B} \mathbf{v}(n) \\ \mathbf{y}(n) &= \mathbf{C} \mathbf{x}(n) + \mathbf{D} \mathbf{v}(n) \end{aligned}$$

Given is the signal-flow graph with $a, b, c, d, e, f, g \in \mathbb{R}$:

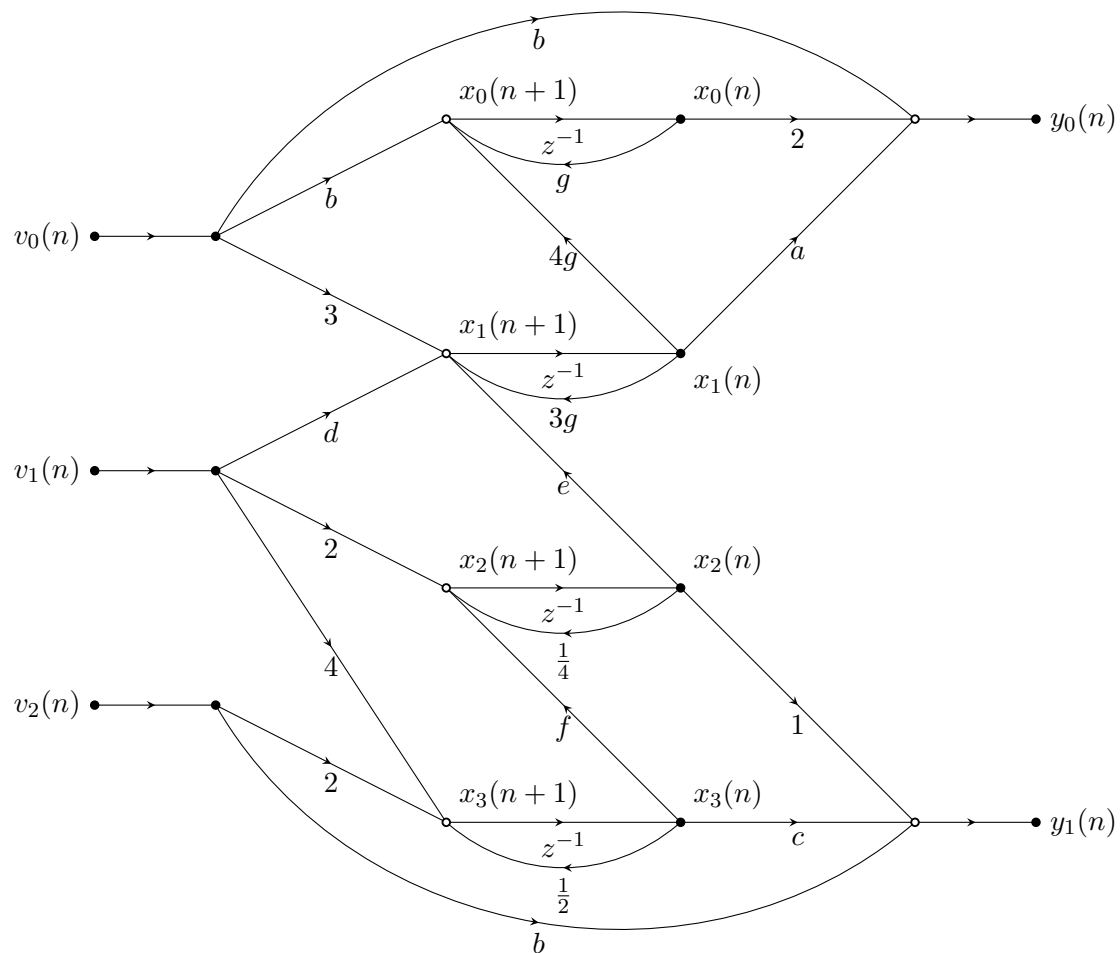


Hint:: Eigenvalues of triangular matrices are the elements of the main diagonal.

- (e) How many inputs, outputs and states does the system have? Which dimensions do the matrices $\mathbf{A}, \mathbf{B}, \mathbf{C}, \mathbf{D}$ have? (4 P)
- (f) Determine the matrices $\mathbf{A}, \mathbf{B}, \mathbf{C}, \mathbf{D}$ and assign them their common names. (6 P)
- (g) Determine the characteristic polynomial of the system matrix. (4 P)
- (h) How can the characteristic polynomial be interpreted with regard to the transfer function? Give reason to your answer. (2 P)
- (i) In which ranges do you need to choose the factors a, b, c, d, e, f, g such that the system is stable? (4 P)

Problem 2 (26 points)

Part 1 This part may be solved independently of Part 2.

Given is the following block diagram:

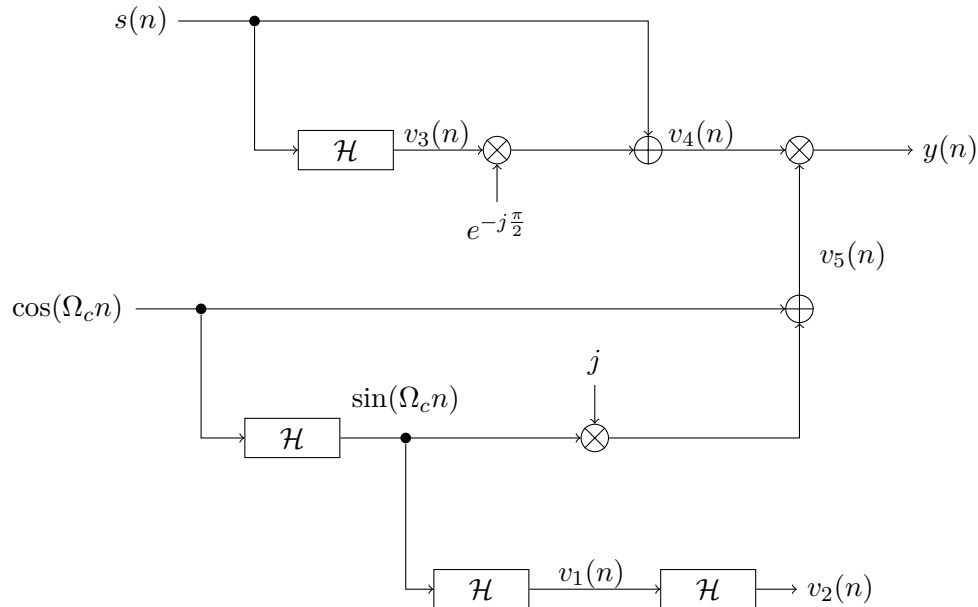


The subsystem \mathcal{H} is the ideal Hilbert transformation. The signal $s(n)$ is fully defined by its spectrum $S(e^{j\Omega})$. Since the spectrum is periodic, only the range $\Omega \in [-\pi, \pi)$ needs to be considered in all tasks. For this range the following definition holds:

$$S(e^{j\Omega}) = \begin{cases} \frac{1}{2} \frac{-2|\Omega| + \pi}{\pi}, & \text{for } \frac{\pi}{6} \leq |\Omega| \leq \frac{\pi}{3} \\ 0, & \text{else} \end{cases}$$

- Compute $v_1(n)$ and $v_2(n)$. (2 P)
- Sketch $S(e^{j\Omega})$ in the interval $\Omega \in [-\pi, \pi)$. (3 P)
- Compute and sketch the spectrum of $v_4(n)$ in the interval $\Omega \in [-\pi, \pi)$. (5 P)
- Compute the spectrum of the output $y(n)$ with $\Omega_c = \frac{\pi}{2}$. (5 P)
- Which modulation type is implemented by the system regarding the input $s(n)$ and the output $y(n)$? (2 P)

Part 2 This part may be solved independently of Part 1.

Given is the following block diagram:

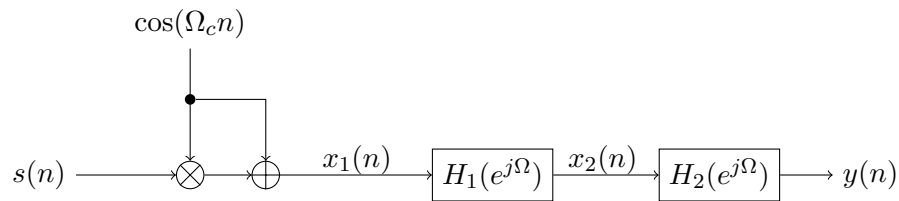

The signal $s(n)$ is fully defined by its spectrum $S(e^{j\Omega})$. Since the spectrum is periodic, only the range $\Omega \in [-\pi, \pi)$ needs to be considered in all tasks. For this range the following definitions hold:

$$S(e^{j\Omega}) = \begin{cases} |\Omega|, & \text{for } \frac{\pi}{12} \leq |\Omega| \leq \frac{\pi}{6} \\ 0, & \text{else} \end{cases}$$

$$H_1(e^{j\Omega}) = \begin{cases} 0, & \text{for } 0 \leq \left| |\Omega| - \Omega_c \right| \leq \frac{\pi}{15} \\ 1, & \text{else} \end{cases}$$

- (f) What is the modulation type regarding the following signals? Give reason to your answer! (4 P)
- (i) $x_1(n)$
 - (ii) $x_2(n)$
- (g) Give both a formula and a sketch for $H_2(e^{j\Omega})$ such that $y(n)$ is a single-sideband modulation of $s(n)$. (5 P)

Problem 3 (41 points)

Given are the stochastic signals $x(t, \phi_1)$ and $y(t, \phi_2)$ with

$$\begin{aligned} x(t, \phi_1) &= e^{j(\omega(t) + \phi_1)} \\ y(t, \phi_2) &= e^{-j(\omega(t) + \phi_2)}. \end{aligned}$$

For all time instances $t \in (-\infty, \infty)$ the definition $\omega(t) = 4t$ holds. The two processes $\phi_{1,2}$ are uniformly distributed over $[\pi, \gamma)$ with $\gamma > \pi$. Assume ϕ_1 and ϕ_2 to be statistically independent of each other.

Part 1 *This part may be solved independently of Part 2 and 3.*

- (a) Are ϕ_1 and ϕ_2 correlated? Give reason to your answer! (2 P)
- (b) Give the probability density function $f_{\phi_1 \phi_2}(\phi_1, \phi_2)$. (2 P)
- (c) Calculate the cumulative distribution function $F_{\phi_1}(\phi_1)$ and sketch it in the interval $[0, 2\pi]$ with all relevant information. Assume $\gamma = \frac{3\pi}{2}$. (4 P)

Part 2 *This part may be solved independently of Part 1 and 3.*

With $\phi_1 \equiv \phi_2$ we obtain

$$z(t, \phi_1) = x(t, \phi_1) + y(t, \phi_1).$$

- (d) Simplify the expression for $z(t, \phi_1)$. How may this signal be interpreted? (3 P)
- (e) Calculate the second statistical moment regarding $z(t, \phi_1)$ in dependence of $\omega(t)$ and γ . **Hint:** $\cos^2(\theta) = \frac{1}{2} \cos(2\theta) + \frac{1}{2}$ (5 P)
- (f) Derive a rule for the values which γ is allowed to take such that the signal $z(t, \phi_1)$ is stationary regarding the second statistical moment. Use the result of task (e) as a starting point. (3 P)

Another signal is given as

$$\tilde{z}(t, \phi_1) = \left| z(t, \phi_1) + 2j \sin(\omega(t) + \phi_1) \right|.$$

- (g) Determine the linear mean and variance of $\tilde{z}(t, \phi_1)$ for an arbitrary time instance $t = \beta$. (4 P)
- (h) Is $\tilde{z}(t, \phi_1)$ ergodic? Give reason to your answer! (3 P)

Part 3 This part may be solved independently of Part 1 and 2.

Given is the discrete noise process $v(n)$ with the constant power density S_0 . An instance of the noise process is used as input for the transmission system $H(e^{j\Omega})$.

$$v(n) \longrightarrow \boxed{H(e^{j\Omega})} \longrightarrow a(n)$$

The autocorrelation function of the output $a(n)$ of the system was found to be:

$$s_{aa}(\kappa) = \begin{cases} -\frac{1}{2}|\kappa| + 1, & \text{for } |\kappa| \leq 2 \\ 0, & \text{else} \end{cases}$$

- (j) Evaluate the autocorrelation function of $v(n)$ at $\kappa = 0, 1, 2$. (2 P)
- (k) Calculate $|H(e^{j\Omega})|$. Simplify your result! (5 P)
- (l) Explain, using (k), why signals like $v(n)$ are often used for system identification purposes. (2 P)

The same transmission system is now used for the input signal $i(n)$. The resulting autocorrelation function at the output of the system is measured as

$$s_{\tilde{a}\tilde{a}}(\kappa) = \begin{cases} 2 \cdot s_{aa}(\kappa), & \text{for } \kappa = 0 \\ s_{aa}(\kappa), & \text{else} \end{cases}$$

- (m) Calculate $S_{ii}(e^{j\Omega})$. (6 P)

This is an empty page.